

HS-6000

NEW PULSE DETECTOR IS COMING

+

*Portable design strong stability
Good Depth*




INTRODUCTION TO PORTABLE DESIGMN

folded Size:65x30x15cm
Unfolded Size:①: 1x1m ②: 2x2m

FOLDING DISPLAY



UNFOLDING DISPLAY

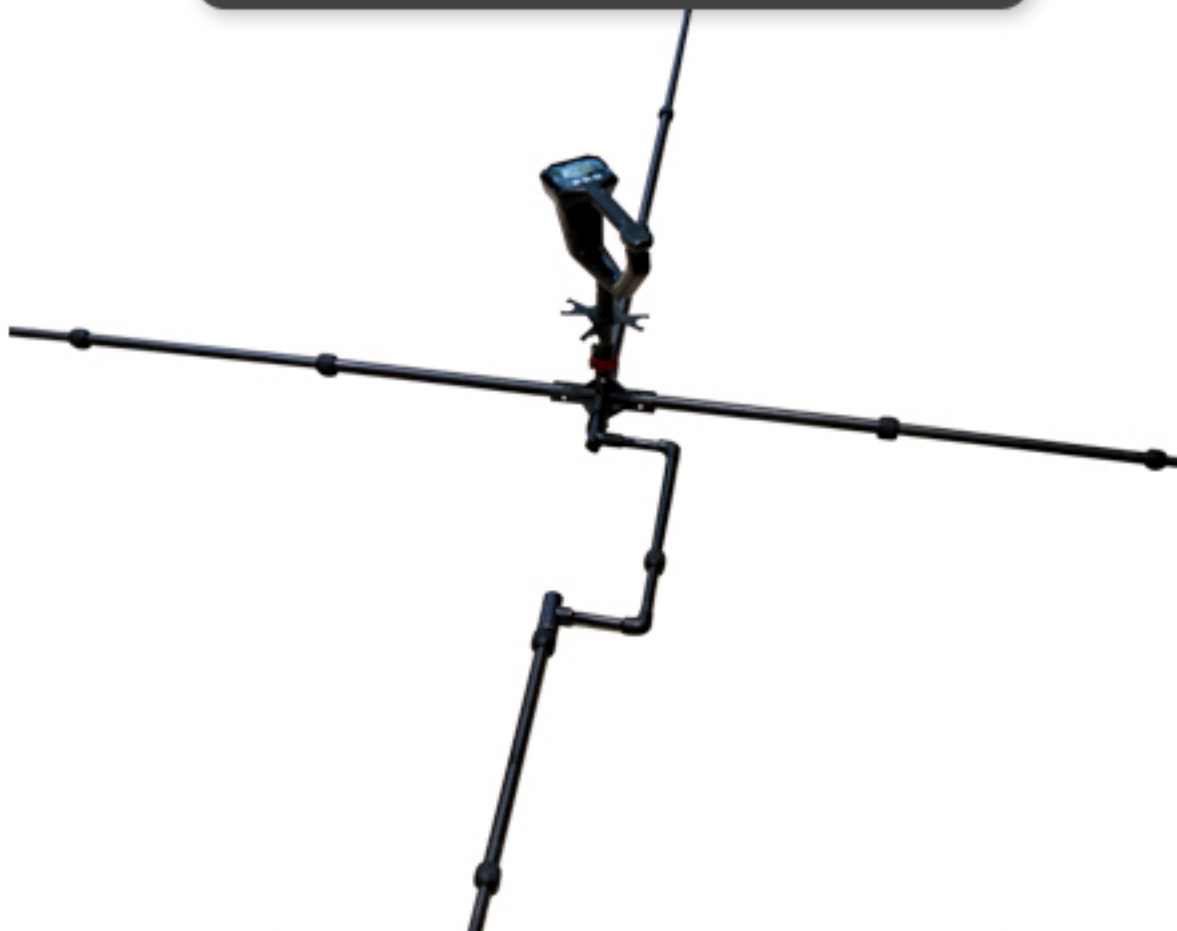

“

STRONG STABILITY



Auto Ground balance Design

Auto Noise Filter

HS-6000





“

ENHANCED DETECTION DEPTH


Pulse technology upgrade
Enhanced pulse detection depth for
deeper detection

HS-6000



“

CARBON FIBER FOLDING FRAME



Portable and lightweight
Durable and not easily deformed

HS-6000



“

CONTROL BOX TOUCH PAD



The controller of HS-6000 has
three buttons

HS-6000





POWER ON/OFF

Power on、Power off、
Backlight on、 off、 Value+and-



MENU

Quick Press this button go into the
Menu Settings



RETUNE

Retune,and increase the value of
each settings



QUICK RETUNE BUTTON

This button is under the handle position,
quick click can retune the machine



“

HARDWARE SPECIFICATIONS

HS-6000

TWO DETECTION MODES

| PROJECT | SPECIFICATION PARAMETERS |
|-------------------|---------------------------------|
| MICROPROCESSOR | 32 BIT 72M HIGH-SPEED PROCESSOR |
| ADC RESOLUTION | 32 BITS |
| ADC SAMPLING RATE | 10KSPS |
| DISPLAY SCREEN | 4-INCH HIGH-DEFINITION LCD |
| CONTROL SOFTWARE | INDEPENDENT RND |
| HOST BATTERY | 4000MAH LITHIUM BATTERY |
| DETECTION COIL | 8M CABLE COIL |
| DISPLAY BACKLIGHT | YES |

“



SOFTWARE SPECIFICATIONS

ACCURATE POSITIONING

HS-6000

| PROJECT | SPECIFICATION |
|---------------------------|---------------------------------|
| PULSE EMISSION FREQ | 100~165HZ, 9 LEVELS, ADJUSTABLE |
| PULSE EMISSION POWER | 6W FIXED POWER |
| THRESHOLD | LEVEL 10, ADJUSTABLE |
| SENSITIVITY | LEVEL 5, ADJUSTABLE |
| FILTER | LEVEL 5, ADJUSTABLE |
| MODULATION | LEVEL 5, ADJUSTABLE |
| MODE | 0~4000 HZ |
| SOUND FREQUENCY | TWO MODES: AUDIO/SILENT |
| AUTOMATIC TUNING | LEVELS 5, ADJUSTABLE |
| SIGNAL STRENGTH INDICATOR | INDICATOR PROGRESS BAR |
| BATTERY LEVEL INDICATOR | HOST POWER DISPLAY |
| SOFTWARE UPDATES | SOFTWARE UPGRADEABLE |



“

HS-6000 CONFIGURATION

HS-6000

Carbon fiber integration Frame
Easy operation Easy Carrying

